



# Mini

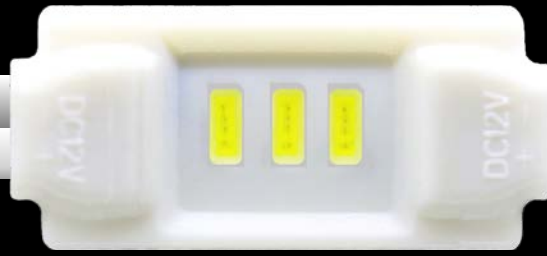

- Ideal for**  
A  
**Small Letters**
- Optimal Depth**  
2-5  
**inches**
- Module Consumption**  
0.30  
**Watts**
- High Brightness**  
30  
**Lumens**
- Beam Angle**  
120°
- Number of modules**  
4 or 6  
**per foot**
- Waterproof**  
IP65
- Long Life Span**  
50,000  
**Hours**
- Max. Load**  
166  
**Per 60W Power Supply**

As Strong as it is Small ! Great for small and halo signs.

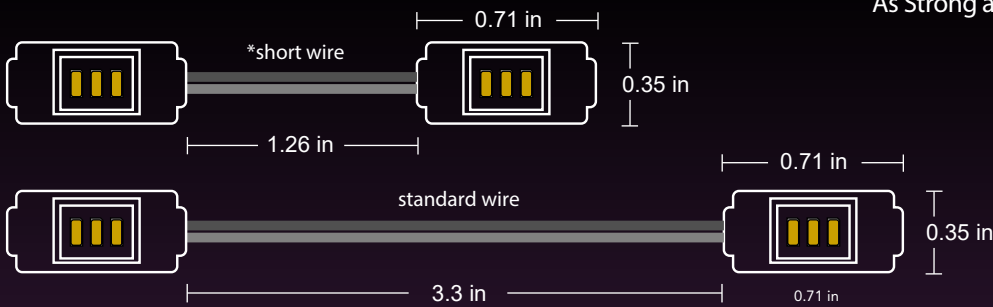

Product Code	Color	Lumens / Module	Watts / Module	Modules / Foot	Max. load for 60W 12V 5A, Class 2	Operating Temperature	Warranty	Waterproof Rating
GL-AL-3-W-CW	White 7200K	30	0,30W	4	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-CW-SW	White 7200K - short wire*	30	0,30W	6	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-DL	White 6500K	30	0,30W	4	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-DL-SW	White 6500K - short wire*	30	0,30W	6	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-WW	White 4000K	30	0,30W	4	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-WH	White 3000K	30	0,30W	4	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-R	Red	10	0,30W	4	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-G	Green	20	0,30W	4	166	-40°C to 70°C	5 years	IP 65
GL-AL-3-W-B	Blue	9	0,30W	4	166	-40°C to 70°C	5 years	IP 65

\* New mini short wire has a 32mm wire (1.26 in)

